DGM8757SVAT



8MP



















H.265







Lens



MicroSD Card

Human / Vehicle Detection

10X Zoom

MIC built-in

Starlight

External I/O


Recording

Al-based 8MP 10X H.265 IR Bullet IP Camera

O FEATURES

- Starlight visibility to offer clear & color images even at night
- 10X zoom lens of f5.0 ~ f50mm for a wider surveillance area
- Al-based human / vehicle detection supported to avoid false detection alarms
- MicroSD card support (up to 256GB) for video storage
- **ONVIF** standard supported to simplify system integration
- POE (Power-over-Ethernet) support to eliminate the use of power cables and reduce installation costs
- Microphone built-in for audio recording and line out support for audio broadcasting
- External Alarm I/O device connection
- IR effective range up to 80 meters for night surveillance
- WDR to increase image recognizability in overexposure and dark areas
- **Remote Surveillance** Compatible with Internet Explorer 6 and above, Microsoft Edge & Google Chrome

O DIMENSIONS

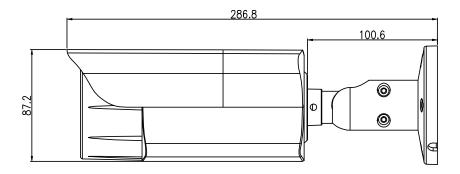

Dimensional tolerance: ± 5mm



O SPECIFICATIONS

Device		
Image Sensor		1/2.8" SONY CMOS
Max. Resolution		3840 x 2160
Lens		f5.0 ~ 50mm / F1.6 ~ F2.2
Viewing Angle		Tele 8.5° ~ Wide 56° (Diagonal)
Min Illumination		0.001 Lux (IR LED off), 0 Lux (IR LED on)
Shutter Speed		AUTO, 1/25s ~ 1/100000s
IR LED		4 units
IR Effective Distance		Up to 80 meters
Day / Night		YES
WDR Mode		YES (120dB)
RTC (real-time clock)		YES
MicroSD Card Slot		YES (up to 256GB)
Video		
Compression		H265 / H.264
Video Resolution	Main Stream	8MP (3840x2160) / 6MP (3072x2048) / 5MP (2592x1944) / 4MP (2560x1440) / 3MP (2304x1296) / 2MP (1080P) / 720P
	Sub Stream	2MP (1080P) / 720P / 720x480 / VGA / 640x360 / 480x360 / CIF
Frame Rate		4K (8MP) @ 20FPS
Video Profile		High profile / Main profile / Base profile
Multiple Video Streaming		3 streams
Bitrate Control		512Kbps - 12Mbps, VBR/CBR
Image Enhancement		WDR / BLC / HLC / 2D DNR / 3D DNR / AWB / MWB / AGC
Day / Night Switch		Auto / Color / (B/W) / Timing
Forced Anti-flicker		YES
Defog		YES
White Balance		Auto / Manual
Image Orientation		Rotate / Mirror
Privacy Mask		YES
Text Overlay		YES
OSD Title		Location / font size / text configurable; text input (English & Chinese characters) and image upload (BMP) supported
Audio		
Microphone built-in		YES
Line out		YES
Encoding		G.711-u / G.711-a
Audio Adjustment		YES
Alarm & Event		
Alarm in		YES
Alarm out		YES
Detection Mode		Motion / Human / Vehicle / Alarm Detection
Detection Schedule		YES
Motion Detection Area		1x1, 2x2, 3x2, 3x3, 4x3, 4x4, 8x8, 16x16, 22x18
Detection Alert		Audio alert with customized mp3 audio file(s)



• SPECIFICATIONS (CONTINUED)

On-Board Storage	Built-in memory card slot, supports microSD / SDHC / SDXC card up to 256GB
Overwrite	YES
Maximum Recoding Time / per File	1, 2, 3, 5, 10, 20 & 30 minutes configurable
Recording Schedule	YES
Network	
LAN Port	RJ45 connector x 1 / 4KV lightning-proof
LAN Speed	100Mbps Based-T Ethernet
Supported Protocols	HTTP / RTSP / FTP / SMTP / DHCP / NTP / NFS / RTMP
ONVIF Compatible	Onvif 17.06 compatible
Number of Online Users	6
Remote Access	Internet Explorer 6 and above (recommended), Microsoft Edge & Google Chrome
General	
Web Interface Language	English, Traditional Chinese, Simplified Chinese, Russian, German, Italian, Turkish, Kol
Operating Temperature	-30℃ ~60℃
Operating Humidity	10%-90%RH
POE	IEEE 802.3af
Power Source (±10%)	PoE / DC12V
Power Consumption (±10%)	< 8 W
Net Weight (kg)	1.45
Casing	IP67
Optional Bracket / Junction Box	AVA145-WHKT / AVM552C-HBKT
	 Intel core i3 or higher, or equivalent AMD 2GB RAM AGP graphics card, Direct Draw, 32MB RAM

.*The specifications are subject to change without notice.