

# DGM3202SCT



3MP

Human  
Detection

H.265



PoE



MIC built-in




DWDR

## AI-based 3MP H.265 IR Dome IP Camera

### FEATURES

- **AI-based human detection** supported to avoid false detection alarms
- **ONVIF** standard supported to simplify system integration
- **POE (Power-over-Ethernet)** support to eliminate the use of power cables and reduce installation costs
- **Microphone built-in** for audio recording
- IR effective range **up to 30 meters** for night surveillance
- **DWDR** to increase image recognizability in overexposure and dark areas
- **Remote Surveillance**  
**Compatible** with **Internet Explorer 6** and above, **Microsoft Edge** & **Google Chrome**

### DIMENSIONS

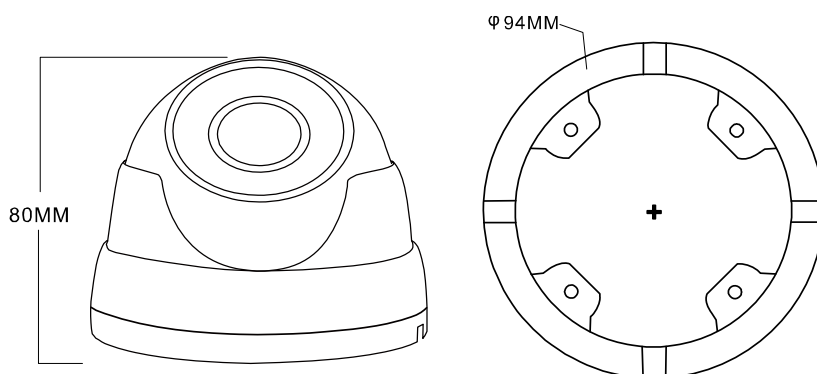

Dimensional tolerance: ± 5mm

## ○ SPECIFICATIONS

■ Device		
Image Sensor	1/2.7" CMOS	
Max. Resolution	2304×1296	
Lens	f2.8 mm / F1.6	
Viewing Angle	112° (Diagonal)	
Min Illumination	0.01 Lux (IR LED off), 0 Lux (IR LED on)	
Shutter Speed	AUTO, 1/25s ~ 1/100000s	
IR LED	18 units	
IR Effective Distance	Up to 30 meters	
Day / Night	YES	
WDR Mode	DWDR	
RTC (real-time clock)	YES	
■ Video		
Compression	H265 / H.264	
Video Resolution	Main Stream	3MP (2304x1296) / 2MP (1080P) / 720P / D1
	Sub Stream	D1 / VGA / 640x360 / CIF
Frame Rate	3MP @ 25FPS / 2MP @ 30FPS	
Video Profile	High profile / Main profile / Base profile	
Multiple Video Streaming	2 streams	
Bitrate Control	32Kbps - 8Mbps, VBR/CBR	
Image Enhancement	DWDR / HLC / 2D DNR / 3D DNR / AWB / AGC	
Day / Night Switch	Auto / Color / (B/W) / Timing	
Forced Anti-flicker	YES	
White Balance	Auto / Manual	
Privacy Mask	YES	
Text Overlay	YES	
OSD Title	Location / font size / text configurable; text input (English & Chinese characters) and image upload (BMP) supported	
■ Audio		
Microphone built-in	YES	
Encoding	G.711-u / G.711-a	
Audio Adjustment	YES	
■ Alarm & Event		
Detection Mode	Motion / Human Detection	
Detection Schedule	YES	
Motion Detection Area	1x1, 2x2, 3x2, 3x3, 4x3, 4x4, 8x8, 16x16, 22x18	
■ Network		
LAN Port	RJ45 connector x 1 / 4KV lightning-proof	
LAN Speed	100Mbps Based-T Ethernet	
Supported Protocols	HTTP / RTSP / FTP / SMTP / DHCP / NTP / NFS / RTMP	
ONVIF Compatible	Onvif 17.06 compatible	
Number of Online Users	6	
Remote Access	Internet Explorer 6 and above (recommended), Microsoft Edge & Google Chrome	

## ○ SPECIFICATIONS (CONTINUED)

■ General	
Web Interface Language	English, Traditional Chinese, Simplified Chinese, Russian, German, Italian, Turkish, Korean
Operating Temperature	-30°C ~ 60°C
Operating Humidity	10%-90%RH
POE	IEEE 802.3af
Power Source (±10%)	PoE / DC12V
Power Consumption (±10%)	< 8 W
Net Weight (g)	274.5
Casing	IP66
Optional Bracket / Junction Box	AVA126-WHKT / AVM552C-HBKT / AVM552C-HLKT
Minimum Web Browsing Requirements	<ul style="list-style-type: none"> <li>• Intel core i3 or higher, or equivalent AMD</li> <li>• 2GB RAM</li> <li>• AGP graphics card, Direct Draw, 32MB RAM</li> <li>• Windows 10, Windows 8, Windows 7, DirectX 9.0 or later</li> <li>• Internet Explorer 6 and above (recommended), Microsoft Edge &amp; Google Chrome</li> </ul>

\*The specifications are subject to change without notice.